

Publish Date : 22.03.2019 | Rev no: 01

ezi-Fiber LC Quick Assembly Connectors

DINTEK's ezi-FIBER™ Mechanical LC Connectors provide an inexpensive, & efficient toolless alternative to terminating fibers without the need for a fusion splicer.

DINTEK's ezi-FIBER™ LC Connectors use V-groove technology, to align the fibers together and maintain physical contact between the fibers. No assembly tool is required to ensure the fibers are mated correctly. The resulting connection using the connector results in an average insertion loss of about 0.1dB.

Applications

- FTTx
- Pigtail connection in premise environments
- Fiber-to-the-Subscriber (FTTx) applications
- Telecommunications
- CATV
- Local area network

Standards

- ISO/IEC 11801
- Cenelec EN 50173-1 / TIA-568 C.0
- Data Center Cenelec EN 50173-5
- ISO/IEC 24764/ TIA-942
- Ethernet IEEE 802.3; 10/40/100GbE

Features

- Minimal tools required
- Low insertion loss of between 0.1-0.2dB
- Environmentally stable
- Easy termination / Fast splicing time
- Suitable for 250 μm and/or 900 μm buffered fibers
- Uses V-Groove alignment technology


Benefits

- Fast splicing time
- Uses V-Groove alignment technology
- Connectors are Re-usable
- Can be joined to make duplex, triplex etc.



ezi-FIBER LC Connectors

The ezi-FIBER LC connector range comes in various options including OM1, OM2, OM3, OM4 and OS2

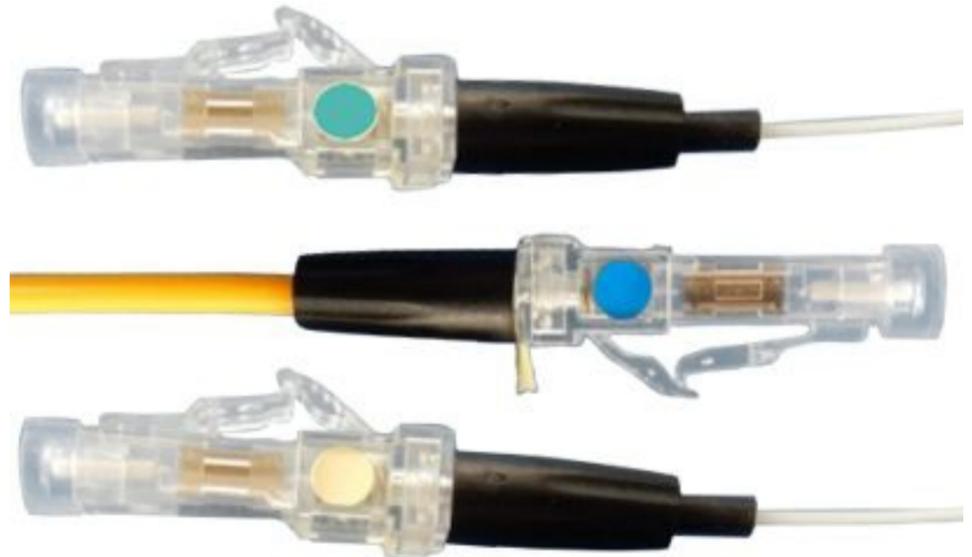

Fiber Accommodations

250um / 900um / 2.0mm / 3.0 mm

Ordering Information

Product Number	Product Name	Connector Type	Color	Mode
2106-02014	ezi-FIBER LC/UPC SM Quick Assembly Connector	LC/UPC	Blue	Single Mode
2106-02015	ezi-FIBER LC/APC SM Quick Assembly Connector	LC/APC	Green	Single Mode
2106-02016	ezi-FIBER LC MM Quick Assembly Connector (50/125)	LC	Beige	Multi Mode
2106-02017	ezi-FIBER LC MM Quick Assembly Connector (62.5/125)	LC	Beige	Multi Mode
2106-02018	ezi-FIBER LC MM Quick Assembly Connector (OM3)	LC	Aqua	Multi Mode
2106-02019	ezi-FIBER LC MM Quick Assembly Connector (OM4)	LC	Aqua	Multi Mode

Technical Specifications

General Specifications

Cable Size	250um / 900um / 2.0mm / 3.0 mm
Assembly Time	30 seconds (after preparing fiber ends)
Materials	Engineering Plastics & Index matching gel

Mechanical Data

Pull Strength (kg), Typical	0.5kgf (900um); 6kgf (3.0mm)
Operating Temperature (deg)	-40 ~ +80°C
Connector Length	41mm

Performance Data

Insertion Loss (dB), Typical	0.1dB Insertion Loss (dB)
Insertion Loss (dB), Maximum	Max 0.2dB
Return Loss (dB), Typical	-50 ~ -55dB

Termination Process

<p>Remove Dust Cap and clean Ferrule. Connect QLC with fiber VFL to verify connections.</p>	<p>Slide on correct boot, and screw cover. Prepare fiber as below. Strip and clean it. Cleave fiber precisely.</p>	<p>Take off Release Key & Turn on the checker.</p>
<p>Insert fiber to LC Connector until it touches the fiber inside.</p>	<p>Form a small curve. Then, press metal Button to connect fibers. You will see no leakage of red light for a low loss</p>	<p>Lock Boot and Wear Dust Cap. Now the connection is complete.</p>
<p>How to re-use Connector Insert the connector Insert release key. Press down to release the metal Button.</p>	<p>How to connect a 3.0mm cable. Insert fiber as shown above. Cut strength member after locking Boot.</p>	<p>To make as duplex, Triplex & Quadruplex, clamp connectors side by side to create multi configurations.</p>

DINTEK Electronic Limited

5F., No.8, Ln. 97, Wugong Rd.
Xinzhuan Dist., New Taipei City 242
Taiwan (R.O.C.)

P: Office: +886-2-22997898 E-mail: sales@dintek.com.tw W: www.dintek.com.tw

2106-0201X