

#### Datasheet

## 2104-0300X

**Light-LINKS**<sup>™</sup>

Publish Date: 24.05.2021 | Rev no: 57

# Light-LINKS SC/SC Duplex OS2 Patch Cords - UPC

DINTEK manufactures a wide range of factory terminated and tested fiber optic patch cords. Available in various fiber types and fiber/cable constructions and connector options, our factory-based assembly and machine connector polishing systems ensure excellence in performance, inter-connectability and durability. All patch cords are 100% tested using standards-based testing procedures.

DINTEK Light-LINKS<sup>™</sup> single patch cords are high-performance, high-quality patch cords used for LAN's, Datacenters, Telecom & FTTx networks, and also high speed metropolitan and WAN networks. The Light-LINKS<sup>™</sup> patch cords are manufactured using LSZH cable which conforms to IEC & TIA standards. The patch cords are terminated with the highest quality connectors, giving them optimum optical performance and reliable repeatability.

### Features

- Connector types available LC/SC/ST/FC/MTRJ/MTP/MPO
- 100% end face inspected & compliance with GR-326-CORE
- High-quality, machine polished connectors for consistent low loss performance
- Short buffer style connector boots for ease of fiber management in high density applications

## **Applications**


- High speed LAN, MAN, WAN networks and Data Centers
- CATV / VIDEO / WDM / DWDM / FTTx / ATM, SONET & WDM
- FTTH, FTTx and Passive Optical Networks PON
- High speed multi channel video, data and voice services in metropolitan and access networks


## **Technical Properties**

- Connector types: SC SC
- Jacket: LSZH
- Insertion Loss: Singlemode:  $\leq$  0.15dB typical /  $\leq$  0.30dB maximum
- Return Loss Singlemode: APC  $\leq$  35dB / UPC  $\leq$  35dB / PC  $\leq$  35dB
- Polish Type: UPC
- Flammability: IEC 60332 Part 3
- Operating Temperature: -40 to +85°C

## **Standards Compliance**

- Fire retardant (IEC 60332-3)
- Corrosion resistant (IEC 60754-2)
- Compliant to TIA 604-5 and IEC 61754-7
- Standards ISO/IEC 11801 / Cenelec EN 50173-1 / TIA-568 C.0
- Data Center Cenelec EN 50173-5 / ISO/IEC 24764/ TIA-942
- Ethernet IEEE 802.3; 10/40/100GbE
- RoHS-6 Compliant

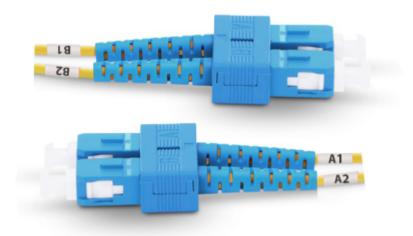

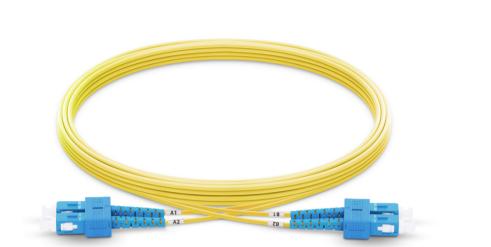

#### **Ordering Information**

| Product Number | Product Name  | Length  | Jacket Color | Jacket Size | Jacket Type |
|----------------|---|---------|--------------|-------------|-------------|
| 2104-03023     | Light-LINKS <sup>™</sup> SC/SC Duplex OS2 Patch Cords - UPC | 1.0 mtr | Yellow       | 2.0mm       | LSZH        |
| 2104-03001     | Light-LINKS <sup>™</sup> SC/SC Duplex OS2 Patch Cords - UPC | 2.0 mtr | Yellow       | 2.0mm       | LSZH        |
| 2104-03002     | Light-LINKS <sup>™</sup> SC/SC Duplex OS2 Patch Cords - UPC | 3.0 mtr | Yellow       | 2.0mm       | LSZH        |
| 2104-03003     | Light-LINKS <sup>™</sup> SC/SC Duplex OS2 Patch Cords - UPC | 5.0 mtr | Yellow       | 2.0mm       | LSZH        |
|                | * Other lengths available on request *                      |         |              |             |             |

#### **DINTEK Electronic Limited**

台北市中山區中山北路二段96號 嘉新第二大樓五樓N511

N511, 5F, 2nd Bldg, No. 96, Sec. 2, Zhongshan N. Rd.Zhongshan Dist., Taipei City 10449, Taiwan P: +886-2-25223138 E-mail: sales@dintek.com.tw W: www.dintek.com.tw

#### 2104-0300X

© 2021 DINTEK Electronic Limited All Rights Reserved.

Publish Date: 24.05.2021 | Rev no: 57