

Publish Date: 24.05.2021 | Rev no: 13

Light-LINKS OM4 Indoor/Outdoor Fiber Cable - Glass Yarn Bca

DINTEK Light-LINKS™ Indoor/Outdoor B2ca Fiber Optic Cables have been designed to meet both the stringent environmental requirements typical of outside plant cable in addition to, the flammability requirements of premise applications in compliance with the CPR grade B2ca. The cable Contains 250micron primary coated fibers inside a tube which has several water blocking yarns, covered with a layer of water blocking glass yarn as strength member and finally completed with an outer jacket.



DINTEK Light-LINKS™ Indoor/Outdoor Fiber Optic Cables are ideal for applications that span indoor and outdoor environments, therefore eliminating the need for entrance facility splice points, which saves money and installation time.

Features

- Standard 08-24C / Central tube design
- Rodent protection
- Excellent mechanical and temperature performance
- High strength loose tube that is hydrolysis resistant
- Glass yarn water blocking strength member
- Crush resistance and flexibility

Applications

- Inter-building connections & Backbone premise pathways
- Up to 100Gbps Ethernet
- SAN,Data Center links
- Indoor/Outdoor any purpose cable distribution

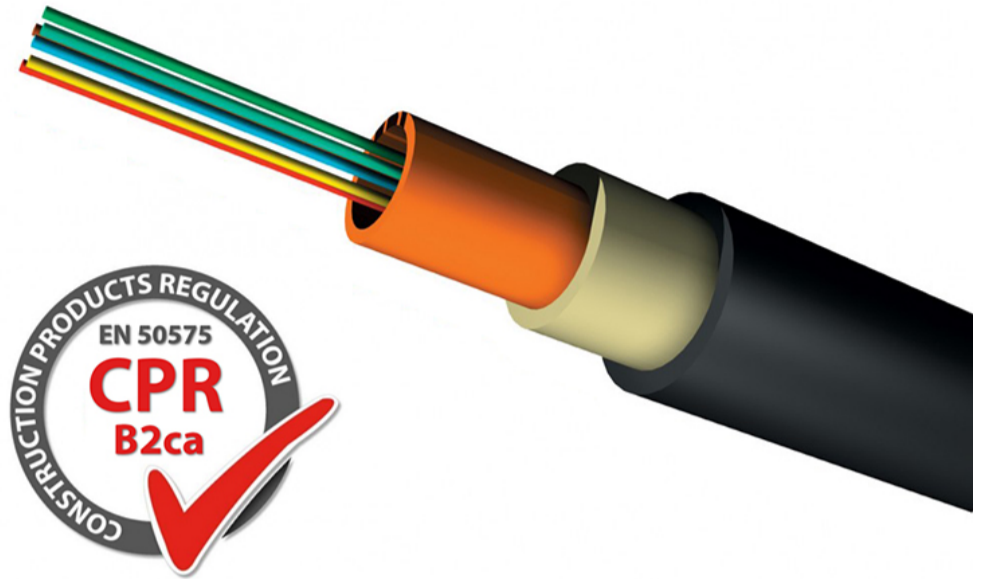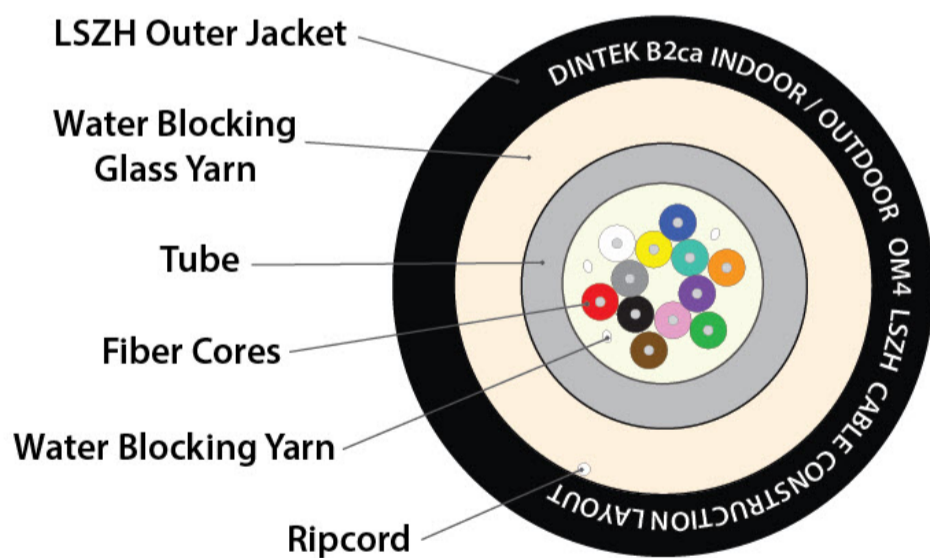

General Standards Compliance

- GR-409
- ICEA-596
- IEC 60794
- IEC 60793
- IEC332-1
- RoHS Compliant

Standards Compliance

Fire Performance	
Fire Test Description	Standards Compliance (Meets Or Exceeds)
Smoke Emission	IEC 61034-1 & 2
Flammability	IEC 60332-1
Flammability	IEC 60332-3-24
Toxicity	IEC 60754-1
Acid Gas Emission	IEC 60754-2
Complies with standards IEC 60794, IEC 60793, RoHS etc	

Ordering Information

Product Number	Product Name	Jacket Type	Strength Member	Fiber Buffer Size	Std Pkg Qty
2102-05107	4 Core Indoor/Outdoor OM4 B2ca Fiber Cable	LSZH	Glass yarn	250 micron	1km or 2km / Reel
2102-05108	6 Core Indoor/Outdoor OM4 B2ca Fiber Cable	LSZH	Glass yarn	250 micron	1km or 2km / Reel
2102-05109	8 Core Indoor/Outdoor OM4 B2ca Fiber Cable	LSZH	Glass yarn	250 micron	1km or 2km / Reel
2102-05110	12 Core Indoor/Outdoor OM4 B2ca Fiber Cable	LSZH	Glass yarn	250 micron	1km or 2km / Reel
2102-05111	24 Core Indoor/Outdoor OM4 B2ca Fiber Cable	LSZH	Glass yarn	250 micron	1km or 2km / Reel

Parameters

Optical Properties					
Multimode	Multimode OM1 850/1300nm	Multimode OM2 850/1300nm	Multimode OM3 850/1300nm	Multimode OM4 850/1300nm	Multimode OM5 850/953/1300nm
Attenuation Typical	3.0/1.0 dB/km	3.0/1.0 dB/km	3.0/1.0 dB/km	3.0/1.0 dB/km	3.0/---/1.0 dB/km
Attenuation Maximum	3.5/1.5 dB/km	3.5/1.5 dB/km	3.5/1.5 dB/km	3.5/1.5 dB/km	3.5/---/1.5 dB/km
Bandwidth(MHz/km)	≥200/500	≥500/500	≥1500/500	≥3500/500	≥3500/1850/500
Effective Modal Bandwidth	-	-	≥2000 Mhz	≥4700 Mhz	≥4700/2470/---
10 Gigabit Ethernet SX	-	-	≤300 Mtrs	≤550 Mtrs	≤600/---/---
Fiber Core Min Bend Radius (mm)	30mm	30mm	7.5mm	7.5mm	7.5mm
Cladding diameter(μm)	125μm ±1.0	125μm ±1.0	125μm ±1.0	125μm ±1.0	125μm ±1.0

Parameters

Mechanical Properties		
Property	Installation	Operation
Tensile Strength	1000N	500N
Min. Bend Radius (D=Cable diameter)	20x D	10x D
Crush Resistance	1000N/100mm, no change in attenuation after the test	1000N/100mm, no change in attenuation after the test

The mechanical properties of optical fibers and cables shall meet international standards of IEC 60794.

Structure Parameters

Material & Environmental		
Items	Specification	
Fiber count	4~24	
	-	
Optical Fiber	Diameter(±5μm)	250
	Color	1. Blue 2. Orange 3. Green 4. Brown 5. Grey 6. White 7. Red 8. Black 9. Yellow 10. Violet 11. Pink 12. Aqua The second set of 12 fibers with black rings is separated from the first set of 12, and the color of NO.20 fiber is natural.
Cable Materials	Core Reinforce	Water Blocking Glass Yarn
	Sheath Material	LSZH Color: Black
Cable Structure	Outer diameter	7.3mm (±0.5mm)
Cable Structure	Cable Weight (kg/km)	Approximately 63kg
Temperature	Storage	-20°C~+60°C
Temperature	Installation	-5°C~+50°C
Temperature	Operational	-20°C~+60°C

Other optical properties should meet international standards of IEC 60793/IEC60794 or ITU-T.

DINTEK Electronic Limited

台北市中山區中山北路二段96號 嘉新第二大樓五樓N511
 N511, 5F, 2nd Bldg, No. 96, Sec. 2, Zhongshan N. Rd. Zhongshan Dist., Taipei City 10449, Taiwan
 P: +886-2-22997898 E-mail: sales@dintek.com.tw W: www.dintek.com.tw

2102-051XX